

OIL-Xplus Stainless Steel Compressed Air Filters



Compressed air systems are often located where the environment and prevailing atmospheric conditions are particularly corrosive. These applications include chemical and petro-chemical installations, offshore drilling platforms and ships, marine and process industries where problems concerning corrosion are increased.

All of the costly problems associated with compressed air contamination can be avoided by installing Parker domnick hunter OIL-Xplus high efficiency compressed air filters.

The OIL-Xplus stainless steel range is particularly ideal for those applications where an aggressive environment is an additional concern.

For 45 years Parker domnick hunter filters has been meeting the needs of the compressed air user by providing the highest quality, clean air to international standards whilst maintaining the lowest running costs.



Contact Information:

Parker Hannifin Ltd
domnick hunter Industrial division
Dukesway, Team Valley Trading Estate
Gateshead, Tyne and Wear
England NE11 0PZ

Tel: +44 (0)191 402 9000
Fax: +44 (0)191 482 6296
Email: dhindsales@parker.com
www.domnickhunter.com

Benefits:

- Delivered Air quality in accordance with ISO 8573-1:2001, the international standard for compressed air quality
- Suitable for all compressed air applications and all compressor types
- Low lifetime costs
- Coalescing and dust removal filters are covered by one year compressed air quality guarantee which is automatically renewed with annual maintenance
- All OIL-Xplus filter housings are covered by a 10 year housing guarantee
- Helps reduce the release of CO₂ into the environment



ENGINEERING YOUR SUCCESS.

OIL-Xplus

High Performance Compressed Air Filtration

Oil Aerosol and Particulate Removal


Typical compressed air filters 'soak up' oil and water and are said to run in a 'wetted out' or saturated state. This temporarily blocks the path of compressed air through the normally open filter structure, and increases the operating pressure drop as the air flow has to force liquids through the fine matrix of the filtration media. This leads to significantly higher energy consumption.

Unlike typical filters, OIL-Xplus filter media does not soak up liquids, ensuring the available open area is kept to a maximum for dirt entrapment. Liquid aerosols coalesce within the anti re-entrainment barrier and fall into the filter bowl to be discharged via the drain.

Solid particulate is captured and held within the open area of the filter media, gradually increasing the differential pressure of the filter to a point where it is more economical to replace the element.

Oil Vapour Removal

Activated carbon with its high affinity for oil vapour is employed in OIL-Xplus grade ACS filters to remove gaseous contaminants such as oil vapours.

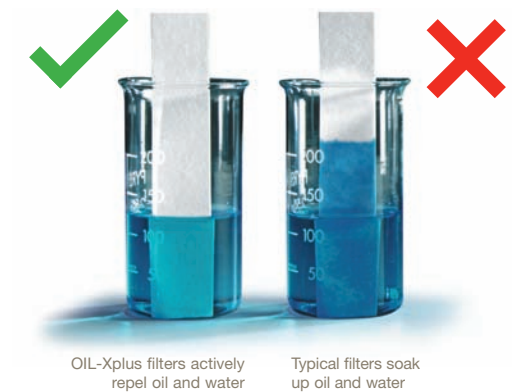

OIL-Xplus stainless steel filter housings



Flexible installation

9 different port sizes (1/4" - 3")

Suitable for aggressive environments

Manufactured from 316L Stainless Steel


Safe

Rated to 16 bar g (232 psi g)

Manual ball valve as standard

(External float drain option available)

OIL-Xplus high efficiency filter elements

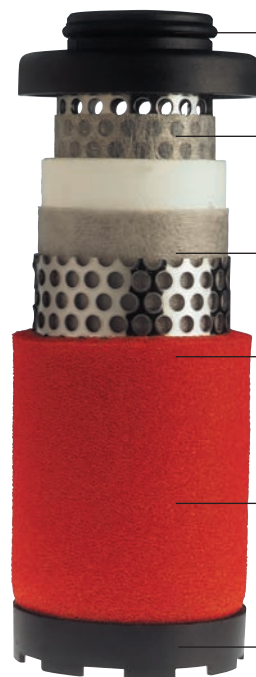

Air tight positive 'O' ring seal
Prevents contamination by-pass.

Support media
For added strength and integral pre-filtration.

96% Voids volume
Gives high dirt holding capacity and provides 12 months life with lowest available energy costs.

Stainless steel inner and outer support cylinders
Provides maximum strength.

Anti re-entrainment barrier
Prevents oil / water carryover and is compatible with a wide range of lubricants.

Chemical resistant
Tough corrosion resistant end caps withstand the worst compressed air conditions.

Technical Data

Max Pressure	16 bar g (232 psi g)	Filter Type	Initial 'dry' differential pressure	Filter Type	Initial 'wet' differential pressure
Max Temp Grade AO, AA, AR	66°C (150°F)	Grade AO/AR	70 mbar (1.0 psi)	Grade AO	140 mbar (2.0 psi)
Max Temp Grade ACS	30°C (86°F)	Grade AA	100 mbar (1.5 psi)	Grade AA	200 mbar (3.0 psi)
Min Temp	1.5°C (35°F)	Grade ACS	70 mbar (1.0 psi)	Grade ACS / AR	N/A

Filtration Grades

GRADE AO High Efficiency General Purpose Protection	Particle removal down to : 1 micron, including water and oil aerosols. Maximum remaining oil aerosol content: 0.6 mg/m ³ at 21°C / 0.5 ppm(w) at 70°F
GRADE AA High Efficiency Oil Removal Filtration	(Precede with Grade AO filter) Particle removal down to: 0.01 micron, including water and oil aerosols. Maximum remaining oil aerosol content: 0.01 mg/m ³ at 21°C / 0.01 ppm(w) at 70°F
GRADE ACS Oil Vapour & Odour Removal	(Precede Grade ACS with Grade AA filter) Maximum remaining oil vapour content: 0.003 mg/m ³ at 21°C / 0.003 ppm(w) at 70°F
GRADE AR General Purpose Dust Filtration	Dry Particle removal down to : 1 micron

Stated flows are for operation at 7 bar g (100 psi g) with reference to 20°C, 1 bar a, 0% relative water vapour pressure. For flows at other pressures apply the correction factors shown.

To correctly select a filter model, the flow rate of the filter must be adjusted for the minimum operating pressure of the system

1. Obtain the minimum operating pressure and maximum compressed air flow rate at the inlet of the filter.
2. Select the correction factor for minimum operating pressure from the CFP table (always round down e.g. for 5.3 bar, use 5 bar correction factor)
3. Calculate the minimum filtration capacity
Minimum Filtration Capacity = Compressed Air Flow Rate x CFP
4. Using the minimum filtration capacity, select a filter model from the flow rate tables above (filter selected must have a flow rate equal to or greater than the minimum filtration capacity)

Product Selection

Filter Type	Port Size	L/s	m ³ /min	m ³ /hr	cfm	Replacement Element Kit	No.
(grade) 0009GSS	G 1/4	9	0.53	32	19	K009 (grade)	1
(grade) 0017GSS	G 3/8	17	1.02	61	36	K017 (grade)	1
(grade) 0030GSS	G 1/2	30	1.80	108	64	K030 (grade)	1
(grade) 0058GSS	G 3/4	60	3.60	216	127	K058 (grade)	1
(grade) 0080GSS	G 1	80	4.80	288	170	K145 (grade)	1
(grade) 0145GSS	G 1 1/2	145	8.70	522	307	K145 (grade)	1
(grade) 0220GSS	G 2	220	13	792	466	K220 (grade)	1
(grade) 0330GSS	G 2	330	20	1188	699	K330 (grade)	1
(grade) 0405GSS	G 2 1/2	400	24	1440	848	K430 (grade)	1
(grade) 0430GSS	G 3	430	26	1548	911	K430 (grade)	1


Correction Factors

Line Pressure	bar g	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
	psi g	15	29	44	58	73	87	100	116	131	145	160	174	189	203	218	232
Correction Factor (CFP)		2.65	1.87	1.53	1.32	1.18	1.08	1.00	0.94	0.88	0.84	0.80	0.76	0.73	0.71	0.68	0.66

Weights and Dimensions

Filter Type	Height (H)		Width (W)		Depth (D)		Weight	
	mm	ins	mm	ins	mm	ins	Kg	lbs
(grade) 0009GSS	210	8.3	145	5.7	112	4.4	2.5	5.5
(grade) 0017GSS	236	9.3	145	5.7	112	4.4	2.5	5.5
(grade) 0030GSS	270	10.6	154	6.1	112	4.4	2.5	5.5
(grade) 0058GSS	382	15.0	190	7.5	148	5.8	4.5	9.9
(grade) 0080GSS	506	19.9	200	7.9	148	5.8	5.0	11.0
(grade) 0145GSS	506	19.9	225	8.9	148	5.8	5.0	11.0
(grade) 0220GSS	628	24.7	280	11.0	210	8.3	10.0	22.0
(grade) 0330GSS	938	36.9	280	11.0	210	8.3	12.0	26.4
(grade) 0405GSS	698	27.5	290	11.4	210	8.3	12.0	26.4
(grade) 0430GSS	698	27.5	300	11.8	210	8.3	12.0	26.4

Housing constructed from Stainless Steel : Grade 316L

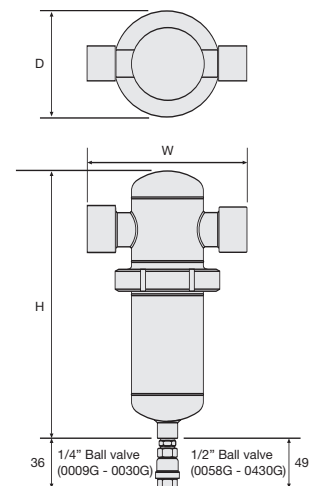

Parker Worldwide

AE – UAE, Dubai
Tel: +971 4 8127100
parker.me@parker.com

AR – Argentina, Buenos Aires
Tel: +54 3327 44 4129

AT – Austria, Wiener Neustadt
Tel: +43 (0)2622 23501-0
parker.austria@parker.com

AT – Eastern Europe,
Wiener Neustadt
Tel: +43 (0)2622 23501 900
parker.easteurope@parker.com

AU – Australia, Castle Hill
Tel: +61 (0)2-9634 7777

AZ – Azerbaijan, Baku
Tel: +994 50 2233 458
parker.azerbaijan@parker.com

BE/LU – Belgium, Nivelles
Tel: +32 (0)67 280 900
parker.belgium@parker.com

BR – Brazil, Cachoeirinha RS
Tel: +55 51 3470 9144

BY – Belarus, Minsk
Tel: +375 17 209 9399
parker.belarus@parker.com

CA – Canada, Milton, Ontario
Tel: +1 905 693 3000

CH – Switzerland, Etoy
Tel: +41 (0) 21 821 02 30
parker.switzerland@parker.com

CL – Chile, Santiago
Tel: +56 2 623 1216

CN – China, Shanghai
Tel: +86 21 5031 2525

CZ – Czech Republic, Klecany
Tel: +420 284 083 111
parker.czechrepublic@parker.com

DE – Germany, Kaarst
Tel: +49 (0)2131 4016 0
parker.germany@parker.com

DK – Denmark, Ballerup
Tel: +45 43 56 04 00
parker.denmark@parker.com

ES – Spain, Madrid
Tel: +34 902 33 00 01
parker.spain@parker.com

FI – Finland, Vantaa
Tel: +358 (0)20 753 2500
parker.finland@parker.com

FR – France, Contamine s/Arve
Tel: +33 (0)4 50 25 80 25
parker.france@parker.com

GR – Greece, Athens
Tel: +30 210 933 6450
parker.greece@parker.com

HK – Hong Kong
Tel: +852 2428 8008

HU – Hungary, Budapest
Tel: +36 1 220 4155
parker.hungary@parker.com

IE – Ireland, Dublin
Tel: +353 (0)1 466 6370
parker.ireland@parker.com

IN – India, Mumbai
Tel: +91 22 6513 7081-85

IT – Italy, Corsico (MI)
Tel: +39 02 45 19 21
parker.italy@parker.com

JP – Japan, Tokyo
Tel: +(81) 3 6408 3901

KR – South Korea, Seoul
Tel: +82 2 559 0400

KZ – Kazakhstan, Almaty
Tel: +7 7272 505 800
parker.easteurope@parker.com

LV – Latvia, Riga
Tel: +371 6 745 2601
parker.latvia@parker.com

MX – Mexico, Apodaca
Tel: +52 81 8156 6000

MY – Malaysia, Shah Alam
Tel: +60 3 7849 0800

NL – The Netherlands,
Oldenzaal
Tel: +31 (0)541 585 000
parker.nl@parker.com

NO – Norway, Ski
Tel: +47 64 91 10 00
parker.norway@parker.com

NZ – New Zealand, Mt Wellington
Tel: +64 9 574 1744

PL – Poland, Warsaw
Tel: +48 (0)22 573 24 00
parker.poland@parker.com

PT – Portugal, Leca da Palmeira
Tel: +351 22 999 7360
parker.portugal@parker.com

RO – Romania, Bucharest
Tel: +40 21 252 1382
parker.romania@parker.com

RU – Russia, Moscow
Tel: +7 495 645-2156
parker.russia@parker.com

SE – Sweden, Spånga
Tel: +46 (0)8 59 79 50 00
parker.sweden@parker.com

SG – Singapore
Tel: +65 6887 6300

SK – Slovakia, Banská Bystrica
Tel: +421 484 162 252
parker.slovakia@parker.com

SL – Slovenia, Novo Mesto
Tel: +386 7 337 6650
parker.slovenia@parker.com

TH – Thailand, Bangkok
Tel: +662 717 8140

TR – Turkey, Istanbul
Tel: +90 216 4997081
parker.turkey@parker.com

TW – Taiwan, Taipei
Tel: +886 2 2298 8987

UA – Ukraine, Kiev
Tel: +380 44 494 2731
parker.ukraine@parker.com

UK – United Kingdom,
Warwick
Tel: +44 (0)1926 317 878
parker.uk@parker.com

US – USA, Cleveland
Tel: +1 216 896 3000

VE – Venezuela, Caracas
Tel: +58 212 238 5422

ZA – South Africa,
Kempton Park
Tel: +27 (0)11 961 0700
parker.southafrica@parker.com

European Product Information Centre
Free phone: 00 800 27 27 5374
(from AT, BE, CH, CZ, DE, DK, ES, FI, FR, IE,
IT, NL, NO, PL, PT, RU, SE, UK, ZA)

